Floor-standing electronic sign

Features:

- High Definition: Employs a high-definition 9:16 full-view LCD display with a maximum resolution of 1080*1920.
- Ultra-thin: Industrial-grade appearance, the entire body is only 83mm thick, and the silkscreen edge is only 37mm.
- Craftsmanship: Aluminum alloy frame, body made of metal-sprayed cold-rolled steel plate.
- Explosion-proof: The surface decorative glass is 3mm high-strength physically tempered glass.
- Performance: Internal heat dissipation uses convection, ensuring worry-free operation under long-term load.
- System options include Android, Windows, input display, and standalone.

Renderings



Technical parameters

Manifest Show 参number	LCD size	32/43/55 inches
	LCD Brands	Brand new original packaging LED commercial LCD panel
	resolution	1080*1920
	Display area	391.8×697.4mm (H×V)/529.4*941.2mm (H×V)/679*1208mm (H×V)
	Display ratio	9:16
	Viewing angle	89/89/89/89 (Left/Right/Up/Down)
	brightness	≥300cd/m2
	Backlight type	E-LED
	Color saturation	16.7M (8-bit)
	Operating frequency	60Hz
	Pixel arrangement	RGB vertical strip
Tie Unification 参number	operating system	Android
	System version	Android 9.0 /11.0/12.0/13.0
	CPU	Quad-core Cortex-A53 with a clock speed of 1GHz
	Memory	1GB / 2G / 4G
	storage	8GB / 16G / 32G
	System Interface	USB ports*2, RJ45 port*1, HDMI-IN port*1
	Video playback	Supports multiple formats including wmv, avi, flv, rm, rmvb, mpeg, ts, and mp4.
	Image playback	Supports multiple formats including BMP, JPEG, PNG, and GIF.
	Network	Supports Ethernet and WIFI
	Timed on/off	Supports customizable power on/off times.
	Mouse and keyboard	Supports hot-swapping
	Audio power	8Ω 5W*2
	Third-party	Supports third-party applications
machine body 参number	Border material	aluminum alloy
	Body material	Hardware cold-rolled steel sheet
	tempered glass	≥3mm high-strength explosion-proof tempered glass
	Body size	453.8*1400*78mm /603.4*1700*83mm/758.6*1850*83.2mm
	Packaging size	550*1500*175 mm /730mm*1800mm*180mm/890mm*1950mm*180mm
	Packaging material	Gravity cardboard box
	Body weight	19.5kg/25kg/28.9kg
	Including packaging	22kg/29kg/34kg
	Installation method	Floor standing
working territory	Use cases	indoor
	Input voltage	AC100-240V
	standby power	≤1W
	Rated power	≤62W
	Usage Environment	Temperature -10℃~50℃ / Humidity 10%RH~90%RH
	Storage environment	Temperature -15℃~65℃ / Humidity 10%RH~95%RH
	Random accessories	One power cord, one WiFi antenna, one remote control, one certificate of

Dimensions

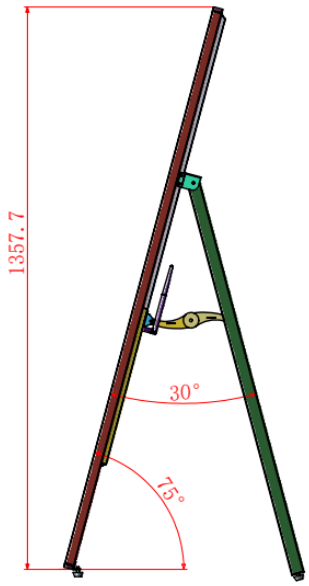
1357.7
30°
75°

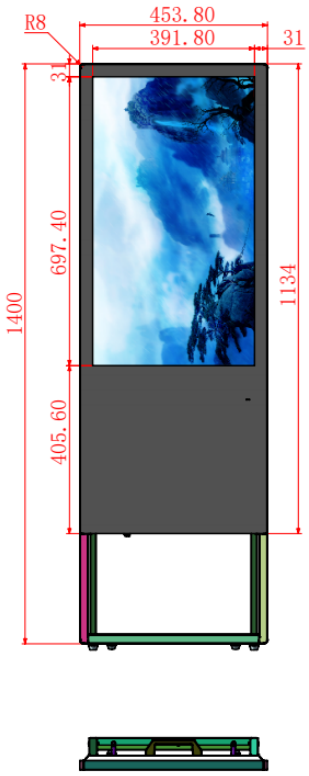
R8
453.80
391.80
31
31
697.40
405.60
1400
1134


35
995
78

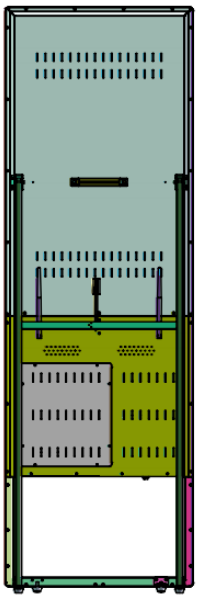

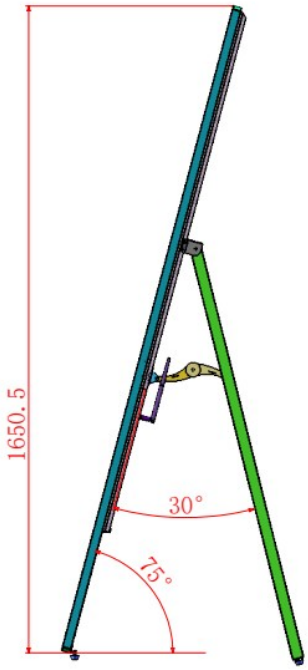
1650.5
30°
75°

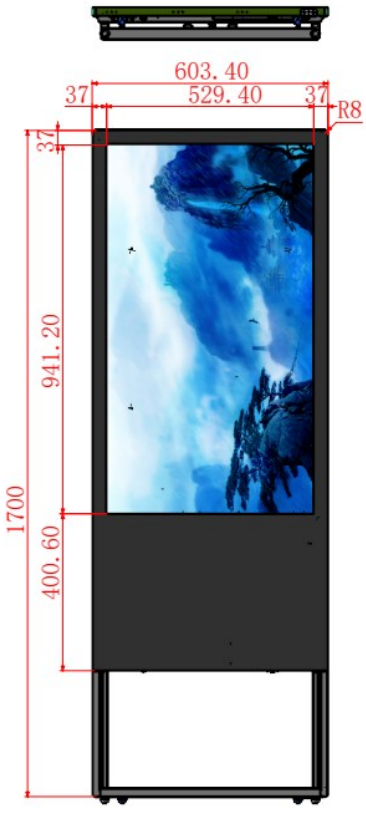
603.40
37
529.40
37
R8
37
941.20
1700
400.60


40
23
83

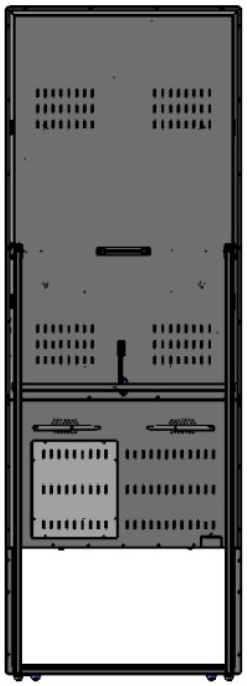

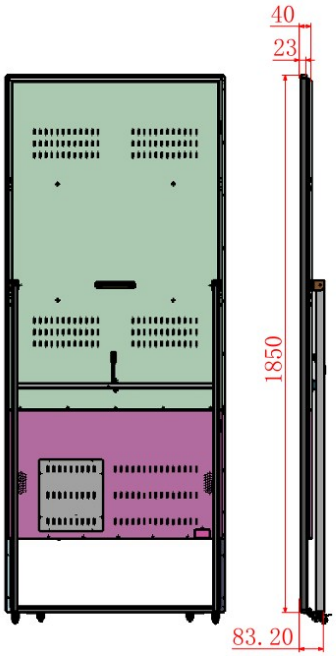
40
23
1850
83.20

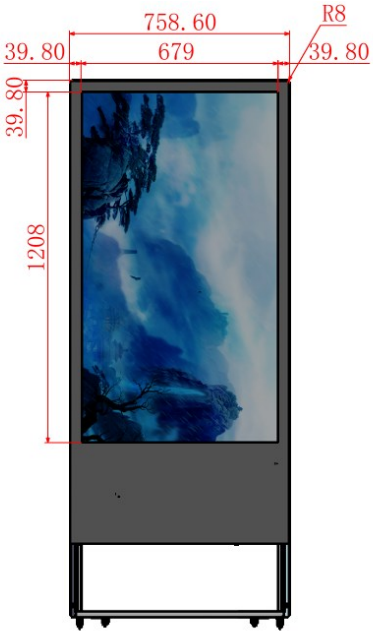
758.60
R8
39.80
679
39.80
39.80
1208

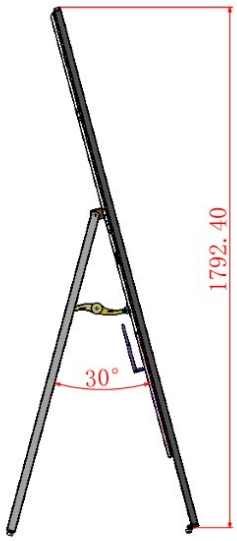
1792.40
30°

