Verified PRO × HUSHIDA

– ODM / OEM / AGENT –

Top 3 Suppliers of LCD Commercial Service Equipment





Alibaba's Most Reputable and Powerful Manufacturer

HUSHIDA 65 75 85 Inch Outdoor Waterproof TV

Highlights at A Glance

- High Definition Resolution: Offers sharp visuals with 1000cd brightness for outdoor clarity.
- 16:9 Aspect Ratio: Perfect for wide-screen content display in outdoor settings.
- 1-Year Warranty: Ensures peace of mind with extended coverage.
- Built-In CMS: Simplifies content management for efficient updates.
- Wall-Mounted Design: Easy installation and secure mounting for outdoor use.



4K

4K UHD
display

1000 nits high
brightness

HDMI IN

IP55(optional)
waterproof

24/7

24/7 hours
working

1200:1
contrast

Product Detail



Front

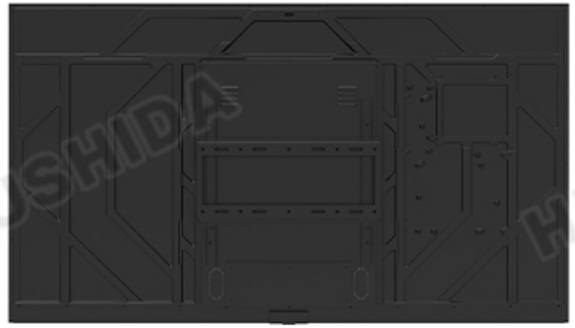

Back



Left Side



Right Side



Rich Interfaces


Ragana
Skūbijs!
Vīrus, kas satricināja pasauli


WORLD CUP 2026


For you
Movies
Shows
Apps
Library
5
All Creatures Great & Small



Product size

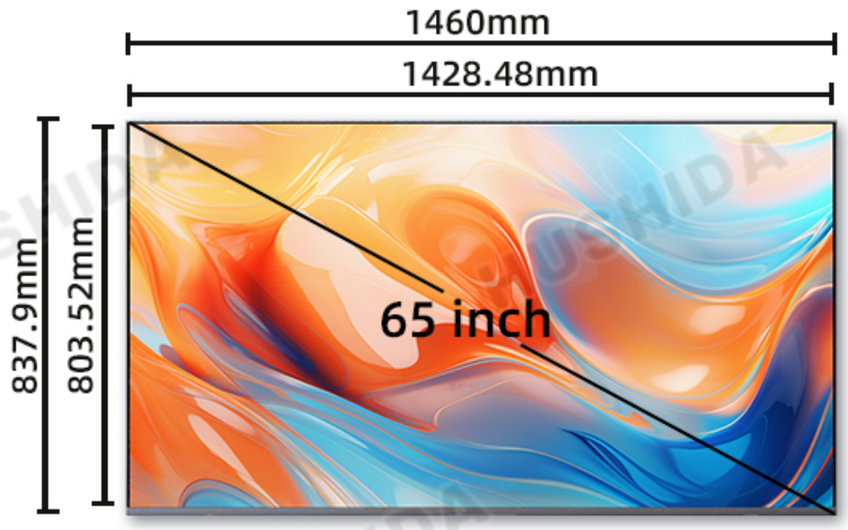

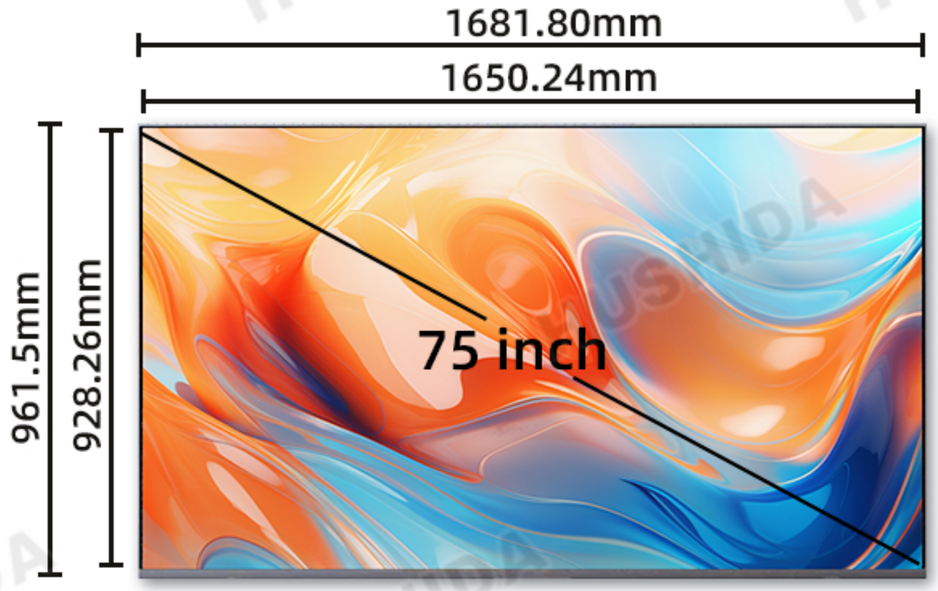

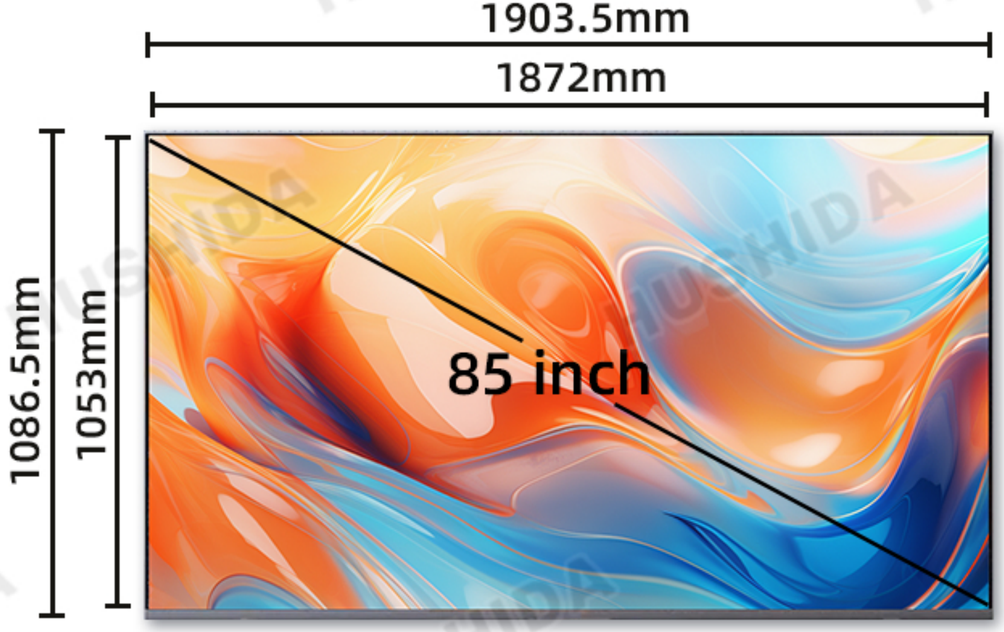

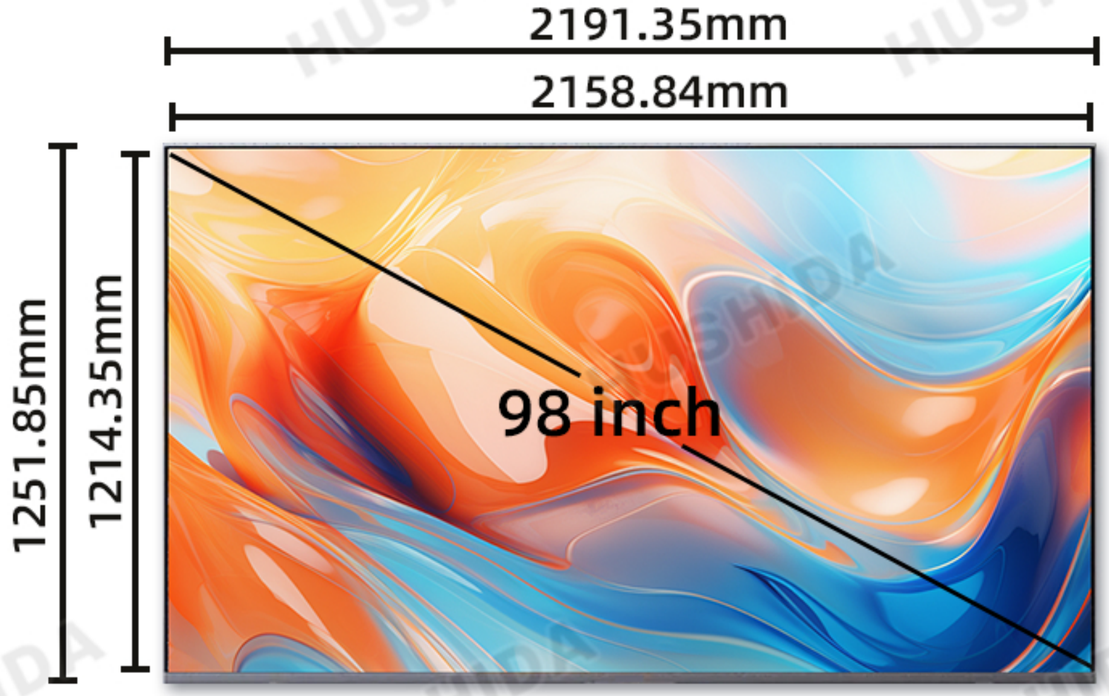

Real Image Display













Product Parameters

Product Name		Outdoor Waterproof TV			
Display	Size	65 Inch	75 Inch	85Inch	98Inch
	Screen Type	LCD			
	Backlight type	D-LED			
	Display area	1428.48(H) ×803.52mm(V)	1650.24(H) ×928.26mm(V)	1872(H) ×1053(V)mm	2158.848(H) ×1214.352mm(V)
	Resolution	3840×2160			
	Brightness	1000cd/m²			
	Response time	7ms			
	Contrast	1200:01:00			
	Frequency	60Hz			
	Color gamut	85% NTSC (CIE1931)		89% NTSC (CIE1931)	72% NTSC (CIE1931)
	Viewing angle	89/89/89/89 (Min.)(CR≥10)			
	Service life	>50000H			
System	chip	MT9603-E			
	CPU	ARM CA-55 Max 1.5GHz			
	GPU	G52 2EE			
	Memory/Storage	2+64G			
	system version	Google			
	External interface	OPTICAL, RT45.AV IN,HDMI3.HDMI2.HDMI1.ATV/DVB-T/C/T2,DVB-S/S2,USB1/USB2			
Machine Parameter	Machine size	1460(L)×837.9(H)×82.2(W) mm	1681.8(L)×961.5(H)×82.2(W) mm	1903.5(L)×1086.5(H)×82.2(W) mm	2191.35(L)×1251.85(H)×82.20(W) mm
	Shell material (face frame/rear shell)	Sheet metal			
	Shell color (face frame/back shell)	Black			
	Waterproof rating	IP55			
	Horn	Waterproof horn,8Ω10W*2			
	Wall mounted hole spacing	400*280mm		800*400mm	/
	Wall mounted hole screw	6*12mm		/	/
	Switching power supply	AC100-240V~(+/-10%),50/60Hz			
	Power interface	Single-phase three wire system			
	Operating Temperature	-10℃ ~ 50℃			
	Storage temperature	-20℃ ~ 60℃			
	Working humidity/storage humidity	30% ~80%			
	Working height	Below 5000 meters			
	Attachment	1. Product manual * 1; 2. Power cord * 1; 3. Warranty card * 1; 4. Certificate of conformity * 1;			